

REVIEW

Microbial fuel cell technology: Novelties for a clean future

Tunc Catal^{1,2*}  | Hong Liu^{3*} 

¹ Department of Molecular Biology and Genetics, Uskudar University, Altunizade-34662, **Istanbul, Türkiye**
ROR ID: [02dzjmc73](https://orcid.org/02dzjmc73)

² Istanbul Protein Research Application and Innovation Center (PROMER), Uskudar University 34662 Uskudar, **Istanbul, Türkiye**
ROR ID: [02dzjmc73](https://orcid.org/02dzjmc73)

³ Department of Biological and Ecological Engineering, Oregon State University, 116 Gilmore Hall, Corvallis, OR 97331, **U.S.A**
ROR ID: [00ysfqy60](https://orcid.org/00ysfqy60)

* **Corresponding authors:** E-mail: tunc.catal@uskudar.edu.tr; Ph.: +90-216-400-2222; E-mail: hong.liu@oregonstate.edu; Ph.: +1-541-737-6309.

Citation: Catal, T., & Liu, H. (2025). Microbial fuel cell technology: Novelties for a clean future. *Euchembioj Rev.* 1(1), Article e25001.

<https://doi.org/10.62063/rev-1>

License: This article is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License (CC BY-NC 4.0).

Peer review: Externally peer reviewed.

Ethics statement: It is declared that scientific and ethical principles were followed during the preparation of this study and all studies utilized were indicated in the bibliography (Ethical reporting: editor@euchembiojreviews.com).

Plagiarism Check: Done (iThenticate). Article has been screened for originality.

Received: 13.06.2024

Accepted: 09.07.2024

Online first: 15.10.2024

Published: 25.01.2025

Abstract

The degree of civilization exhibited by a society is largely determined by its reliance on energy, and as traditional energy sources such as fossil fuels become scarcer, new technologies will be required to secure sustainable energy. Microbial fuel cell technology is one of the most creative ways to meet humanity's energy demands because it can generate electrical energy from carbon sources. The framework of the limitations limiting the dissemination of this technology has been used to explore in depth new designs and configurations that have been produced recently. Future developments and current applications of this technology in bioremediation investigations are explored. The use of microbial fuel cell technology as a microbial biosensor for the identification of environmental contaminants is particularly significant. However, for a clean and sustainable ecosystem, it is imperative to disclose the challenges associated with the future adoption of this technology.

Keywords: Electricity, microbial fuel cell, microbial electrochemistry, renewable energy



Introduction

Microbial fuel cells (MFCs) have attracted great attention in recent years as an important alternative technology for energy production from renewable sources (Bazina et al., 2023; Catal et al., 2024). These devices, utilize the power of current bioelectrochemical technologies via microorganisms to convert organic carbon resources found in waste materials into electricity (Ishaq et al., 2023). Thanks to this technology, which can be integrated into wastewater treatment facilities, clean energy can be produced and has potential for the future (Bhaduri and Behera 2024). Microbial fuel cells are actually similar to traditional batteries, but unlike batteries, they are open systems and contain biological objects. Although it has various configurations, there are basically two important parts: anode and cathode (Mohyudin et al., 2022). Biological reactions occur mostly in the anode part. Electrochemically active microorganisms break down organic substances as a result of their metabolic activities, and electrons and protons are formed in this process called oxidation (Thapa et al., 2022). Microbial fuel cells can produce electricity by capturing these released electrons (Vidhyeswari et al., 2022). The anode part of the microbial fuel cell attracts electrons from these microorganisms. These electrons pass through an external conductive outer wire, producing an electric current. Then, these electrons reaching the cathode react with oxygen (or another final electron acceptor) and form a water molecule (Zhuang et al., 2010). With these features, microbial fuel cells have the potential to solve two important problems: energy production and wastewater treatment (Gul et al., 2021). As exoelectrogenic microorganisms consume organic compounds, water can become cleaner while simultaneously producing electricity (Suresh et al., 2022). Additionally, microbial fuel cells are a sustainable and renewable energy source (Sorgato et al., 2023). Microbial fuel cells do not require fossil fuels to function and can use various organic substances found in nature as fuel (Apollon 2023). Although it is simple in terms of working principle, this technology is still in the development stage. One of the main challenges is the current levels of power production produced by this technology. Microbial fuel cells generally produce low power, which limits their areas of application. Therefore, research is being carried out on the development of new designs to increase power production (Priya et al., 2022). Additionally, there is a need to develop new electrode and membrane materials for the optimization of microbial fuel cells, as well as to identify the most efficient microbial communities to increase electron transfer and performance (Prathiba et al., 2022). Despite these challenges, the potential applications of this technology are diverse (Zhang et al., 2022a). Perhaps the most important of these application areas is wastewater treatment. Microbial fuel cells integrated into the wastewater treatment plant can both make the wastewater cleaner and contribute to the operating cost of the plant with the electrical energy it produces (Saran et al., 2023). Additionally, in areas where transportation is difficult, environmental sensors and small electronic devices can be powered by microbial fuel cells integrated into the facility (Khan et al., 2020). With extensive research to be carried out, this technology can become an important actor in the field of clean energy in the future. The reduction of fossil fuels already requires renewable energy technologies (Icaza-Alvarez et al., 2023), and as a more sustainable ecosystem element, microbial fuel cells can serve humanity by harnessing the power of microorganisms.

Although fossil fuels dominate the energy field today (Yildiz 2018), fuel cells are one of the alternative technologies (Chandran et al., 2022). However, microbial fuel cells have some advantages over traditional fuel cells such as operation at low temperatures (Roy et al., 2023). With these features, microbial fuel cells have the potential to revolutionize energy production techniques in the future. While traditional fuel cells require the use of various fuels such as hydrogen (Abdelkareem et al.,

2021), microbial fuel cells can use a wide range of organic compounds as fuel, such as wastewater, organic wastes and lignocellulosic materials (Catal et al., 2008a; Catal et al., 2008b; Catal et al., 2011b; Bermek et al., 2014). In this way, they contribute to reducing our need for fossil fuels. They are also important in converting waste into a value-added product. In addition, microbial fuel cells are an environmentally friendly alternative due to their renewable and sustainable nature, as MFCs can significantly reduce methane and N_2O emissions (Wang et al., 2019). While traditional fuel cells focus only on electricity production, microbial fuel cells provide versatile use by performing both electricity production and wastewater treatment simultaneously. While traditional fuel cells require large-scale infrastructures for energy production (Kampker et al., 2020), microbial fuel cells also enable scale-up with their portable designs (Catal et al., 2018). Recently, researchers have been working to increase power output by combining multiple microbial fuel cells (Fan et al. 2024). With these portable and scalable features, there are large-scale designs integrated into the wastewater treatment plant as well as small-scale designs for sensor use (Catal et al., 2019a). Although conventional fuel cells have special operational requirements, microbial fuel cells can operate in a wide variety of environmental conditions, including low temperatures and a wide range of substrates (Catal et al., 2011b; Catal et al., 2011c). Thanks to these adaptable features, microbial fuel cells provide the opportunity to operate various devices in regions where the use of traditional technologies is difficult. Ultimately, microbial fuel cells, as an alternative to traditional fuel cells, are promising in the field of clean energy production with features such as versatility, sustainability, scalability and adaptability. However, in order to advance this technology, there is a need to research and understand its working mechanisms, microbial metabolism principles and different configurations.

Essentials of MFCs

Microorganisms function in microbial fuel cells are electroactive (Catal et al., 2024). While these microorganisms produce energy for their own needs by breaking down carbon sources through oxidation reactions, they also release the electrons and protons produced. These released electrons are used to produce electricity (Aiyer 2020). The anode attracts electrons like a magnet. These electrons, transferred to the cathode through an external circuit, flow to the cathode and react with an electron acceptor such as oxygen to produce water (Arkatkar et al., 2021). A membrane is generally used in two-chamber microbial fuel cell configurations. These membranes separate the anode and cathode parts and allow only protons to pass (Kook et al., 2019). However, there is no need to use membranes in single-chamber configurations. Electric current occurs during the transfer of electrons through an external conductive wire.

To increase and optimize power production in microbial fuel cells, it is crucial to understand the energy metabolism, metabolic pathways, and substrate consumption of microbial cells (Thapa et al., 2022). Exoelectrogenic microorganisms are one of the most important components functioning in this technology. These microorganisms can transfer the electrons released during their metabolism to conductive surfaces (Chen et al., 2018). This is just one of the electron transfer mechanisms. These exoelectrogenic microorganisms can use different metabolic pathways while consuming the carbon source in organic substances as a substrate. Fermentation is a common metabolism for many exoelectrogenic microorganisms. In the absence of oxygen, they break down carbon sources and organic molecules and transfer the released electrons to the anode (Georg et al., 2020). Methane (CH_4) and electricity are the end products of ethanol fermentation, for example. First, ethanol is fermented to produce acetate and H_2 , and then, on the anode, H_2 and acetate can be immediately

oxidized to generate current (Georg et al., 2020). Additionally, some exoelectrogenic microorganisms support the function of the microbial fuel cell by using substances such as nitrate or sulfate as electron acceptors (Fu et al., 2013). Their ability to consume a wide range of substrates is a significant advantage for exoelectrogenic microorganisms. Generally, easily consumable substrates such as sugars are consumed first, followed by complex carbon sources (Catal et al., 2011b). This preference may vary depending on type, energy efficiency and metabolism of microorganisms. Investigating the metabolic pathways and substrate consumption preferences of these microorganisms is essential to increase the performance of microbial fuel cells. Understanding microbial communities, especially those that exhibit high electron transfer rates and efficient substrate consumption profiles, is necessary to develop strategies to increase energy efficiency (Kumru et al., 2012). In this way, optimizing the content of organic substances to be used as fuel seems to be beneficial for encouraging microorganisms that can produce electricity more efficiently. However, a thorough understanding of electron transfer mechanisms in microbial fuel cells is required to achieve efficient electricity production.

Electron transfer processes in MFCs

One of the most important steps in electricity production in microbial fuel cells is electron transfer to the anode. In general, these transfer mechanisms can be grouped under two main headings: direct and indirect electron transfer (Aiyer 2020). In the direct electron transfer mechanism, electroactive microorganisms make physical contact with the anode using structures such as pili or outer membrane cytoplasm (Li et al., 2021a). Electrons are transferred directly from the microorganism to the anode surface (Li et al., 2021a). Since there is no intermediary in this mechanism, electrons are transferred more efficiently. However, some microorganisms do not have the ability to transfer electrons directly and they transfer electrons through indirect electron transfer (Zhang et al., 2022b). In this mechanism, intermediary molecules generally take these electrons from electroactive microorganisms and act as intermediaries in their transfer to the anode surface. Substances such as various quinones, and methylene blue, methyl orange, methyl red can be used as electron mediators (Babanova et al., 2011; Freguia et al., 2009). Although there is a wide range of microorganisms involved in indirect electron transfer, it may be less efficient as electrons and energy may be lost during the shuttle process. The efficiency of electron transfer in microbial fuel cells depends on various factors (Zhao et al., 2009). Electrode materials with larger surface areas increase efficiency because they allow contact with electroactive microorganisms on a larger surface area. Research is being carried out to increase the anode surface with various nanotechnological approaches. By understanding the electron transfer mechanisms that occur with electroactive microorganisms, it may be possible to develop microbial fuel cells with the most appropriate design and configuration to increase power efficiency. New strains reported to be electroactive in microbial fuel cells continue to be identified. Electroactive microorganisms have also environmental protective effects through their interesting abilities (Dong et al., 2024; Sukkasem, 2024). *Geobacter* bacteria, known to form conductive batteries or adducts to electronically couple to extracellular electron acceptors such as uranium and iron oxide minerals, can be used in microbial fuel cells (Reguera, 2018). Application of magnetic field has been reported to increase the overall energy efficiency of *Geobacter sulfurreducens* and greatly enhance its ability to generate electricity (Zhou et al., 2023). Additionally, some studies have shown that *Geovibrio* species can also be found along with *Geobacter* species (Ait-Itto et al., 2024). Electron uptake from the cathode by *Lactiplantibacillus plantarum*, a predominantly fermentative bacterium found in fermented foods and in the intestines of mammals, has been reported (Tejedor-Sanz et al.,

2023). Electricity production was reported with the *Shewanella chilikensis* MG22 strain discovered using 16S rRNA analysis in microbial fuel cells (Efraim et al., 2023). *Shewanella algae*-L3 was isolated from conditioned sludge of brewing wastewater and its role in electricity production was reported (Wu et al., 2024). When we consider how vast the microbial biomass is in our world, it is not surprising that new microorganisms are being discovered. Both the electricity production efficiency and biological remediation properties of microorganisms with this feature can be improved with genetic engineering approaches. However, there may also be microorganisms that are reported to be electroactive and are found in electroactive biofilms containing mixed microorganisms but do not have a direct or indirect function in electron transfer.

Different MFCs designs and configurations

Although the basic principle is similar in microbial fuel cells, there are designs with different types and configurations (Mohyudin et al., 2022). Depending on their electron transfer mechanism, microbial fuel cells can be divided into two main groups: mediated microbial fuel cells (i) and non-mediated microbial fuel cells (ii) (Moon et al., 2006; Babanova et al., 2011). In mediated microbial fuel cells, electrons are transferred through shuttle molecules that function as intermediaries, and these electrons are transferred to the analyte surface. Some of these intermediary molecules can be produced by electroactive microorganisms. Microorganisms capable of direct electron transfer are used in mediator-free microbial fuel cells (Moon et al., 2006; Catal et al., 2008a). Apart from these two groups, there are microbial electrolysis cells, which are a new type of microbial fuel cell (Kilinc et al., 2023). While microbial fuel cells can be used to produce electricity, microbial electrolysis cells enable the production of hydrogen gas (Cebecioglu et al., 2021). Thanks to this technology, hydrogen gas, which is a carbon-neutral source, is produced while requiring the use of energy as it needs application potential. In recent years, soil microbial fuel cells, in which soil is used in the anode part, have been investigated especially because they also have bioremediation potential (Kilinc and Catal 2023). Microbial fuel cell designs using algae or cyanobacteria capable of photosynthesis use light for electron production and are called phototrophic microbial fuel cells (Strik et al., 2010). Nanoporous membrane microbial fuel cells use nanoporous membranes that separate the anode and cathode parts (Biffinger et al., 2008). Similarly, durable and stable ceramic membranes that allow long-term operation can be used (Merino-Jimenez et al., 2019). The positioning of electrodes and, if any, compartments in a microbial fuel cell also affects the configuration. According to their configuration, microbial fuel cells can be grouped as single chamber (i), double chamber (ii), or stacked type (iii) or air cathode (iv) (Santoro et al., 2015; Cebecioglu et al., 2022; Fan et al., 2024). Single-chamber microbial fuel cells have a very simple design (Akagunduz et al., 2022). Depending on its volume, it has advantages such as being portable, cost effective and easy to install. However, diffusion of oxygen into the system negatively affects microbial activity and electron transfer. Two-chamber microbial fuel cells are separated into two chambers using a membrane or salt bridge (Mirza et al., 2022). These components allow the transfer of protons but restrict the passage of other compounds. However, these membranes are mostly quite expensive materials. To increase power efficiency, multiple microbial fuel cells can be connected to each other in series or parallel in a stacked type (Fujimura et al., 2022). This allows for higher energy output. Air cathode microbial fuel cells eliminate the problem of air pumps or pure oxygen supply. In this type of microbial fuel cells, oxygen in the air is used to catalyze the spontaneous reaction and contributes to the operating cost by reducing complexity. The choice of configuration depends on the desired requirements and environmental conditions for the application, and significant advances have been made in this

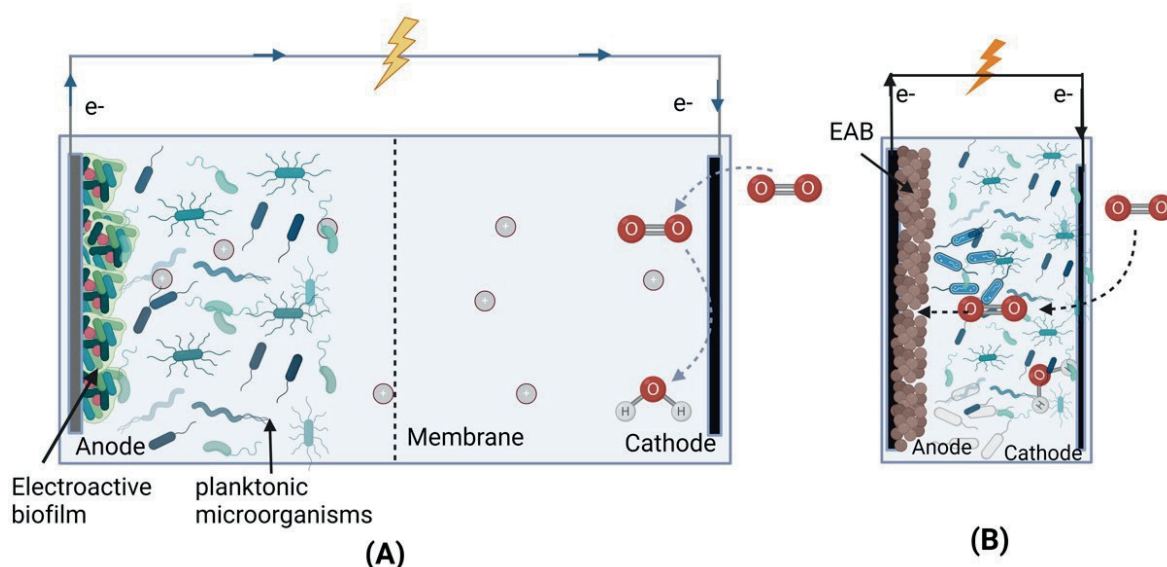


Figure 1. A dual chamber MFC (A) and a single chamber MFC configurations. EAB: electroactive biofilm (Created with [BioRender.com](https://www.biorender.com)).

Latest Advances in MFC Technology

One of the most important parameters affecting energy efficiency in microbial fuel cells is the anode material used. A suitable anode material must have various properties. A good anode electrode should easily receive electrons from microorganisms and transfer them effectively to the external circuit (Kang et al., 2015). In addition, it must provide a suitable environment for the growth of electroactive microorganisms and must be biocompatible (Tahir et al., 2021). In this way, it should allow microorganisms to form biofilm. Materials that provide a large surface area are especially preferred because they provide more effective electron transfer (Walter et al., 2020). It is important in terms of cost that the material to be used as the anode material be durable and stable for a long time and also be cheap (Zhu et al., 2022). So far, different materials have been researched and used with various advantages and disadvantages. One of the most used anode materials is carbon-based materials, which have a large surface area and high conductivity (Akul et al., 2021). Graphite felt, carbon fibers, activated carbon, carbon cloth are examples of commonly used anode materials (Wang and Feng 2017; Delord et al., 2017; Gajda et al., 2020; Sen et al., 2020). Some carbon materials can negatively affect energy production performance because they allow undesirable microorganisms to grow on the anode surface. However, metallic materials can also be used as anode due to their high conductivity and durability (Wang et al., 2016). However, they have disadvantages in terms of bioavailability. Recently, various composite materials that provide advantages in terms of biocompatibility and catalytic activity have also been investigated as anode materials (Roh and Woo 2015). Studies are being carried out on these composite materials, the composite of carbon materials, which have certain properties of different materials, with metal oxides. Conductive polymers such as polypyrrole and polyaniline have been proposed as anode materials because they have advantages in terms of bioavailability (Jia et al., 2020). Selection of a suitable anode material depends on the area of application, cost and desired properties. Extensive research is being carried out on anode materials with optimized properties, which can pave the way for cost-effective bioelectrochemical systems.

Cathode development

Although the anode has an important place in the performance of microbial fuel cells, the cathode is equally important. In order to produce electricity, electrons coming from the anode must react at the cathode with the help of cathode, usually in the presence of oxygen (Chen et al., 2023). The cathode material used significantly affects electricity generation performance. The most important element that a good cathode material should have is high oxygen reduction reaction activity. This reaction must be catalyzed efficiently (Zheng et al., 2022). When oxygen reduction reaction activity is slow, it causes performance loss. Additionally, its high electrical conductivity is important for efficient electron transport. It must be resistant to long-term operations and be able to maintain its function stably for a long time. Being cheap and competitive in terms of cost is also one of the reasons for choosing cathode materials (Behera et al., 2010). Air cathodes, one of the most commonly used cathode types, use the oxygen present in the air and do not require additional oxygen supply. These designs are generally simpler and can be said to be cost effective. In addition, since it requires oxygen in the air to operate, it may have a slower kinetic activity, resulting in lower power output. To increase catalytic activity, carbon materials treated with catalysts such as cobalt, iron and platinum are used (Mahmoud et al., 2011; Ozdemir et al., 2019; Yu et al., 2021). In recent years, biofuels that use microorganisms' own enzymes or biomimetic catalysts have come to the fore. Biocathodes can provide advantages in terms of high catalytic activity and compatibility (Qiu et al., 2021). Although metal-based cathodes are expensive, they are very advantageous in terms of high efficiency (Mahmoodzadeh et al., 2023). Composite cathodes also stand out as alternative materials in that they contain the desired properties of different materials (Antolini 2015). In selecting the most suitable cathode material, factors such as the area of application, desired efficiency and performance parameters, and cost are important. As microbial fuel cell technology develops, it will require the development of new and innovative cathode materials with high catalytic activity, cost-effectiveness and durability.

MFC configurations with improved efficiency

There are some limiting factors in the widespread use of microbial fuel cells. In order to overcome these limiting factors, innovative approaches have been demonstrated in recent years to increase power efficiency. Stacking approach has recently been used to increase the power efficiency of microbial fuel cells (Fan et al., 2024). This approach is based on the principle of stacking multiple microbial fuel cells in series or parallel (Estrada-Arriaga et al., 2018). When microbial fuel cells are connected in series, voltage production is increased. However, when connected in parallel, the current output increases. Various microbial fuel cells can be stacked in series or parallel depending on the purpose of the application. Modular microbial fuel cells allow the preparation of scale-up systems by assembling smaller units (Liang et al., 2018). This type of microbial fuel cells can be used especially for bioremediation purposes. Microfluidic microbial fuel cells have some advantages as they allow faster electron transfer (Ouyang et al., 2023). Particularly for biosensor applications, such microfluidic microbial fuel cells offer opportunities for integration. Bipolar plate-electrode assembly (BEA) design, which significantly increase the performance of microbial fuel cells, is also an innovation (An et al., 2014). New strategies are being developed within the scope of the development of electrode materials that encourage the growth of microorganisms and the formation of biofilms. By adding polyquaternium-7, the surface hydrophilicity was enhanced and the composite electrode's biocompatibility for bacterial attachment, colonization, and substrate diffusion was improved in a previous paper (Li et al., 2021b). Additionally, microbial fuel cells can be integrated

into other systems. Table 1 shows recent advances in MFC performances. This technology can be integrated with other technologies for desalination (Aber et al., 2023). In addition, the salt water formed in this process can also serve as a food source for microorganisms. Bioremediation offers a wide range of research and application opportunities as an application area (Li et al., 2015). Thanks to their integration with microbial electrolysis cells, the microbial fuel cell produces electricity, while the microbial electrolysis cell can use this power to produce hydrogen gas.

Application areas of MFCs

MFCs in wastewater treatment and bioremediation

Microbial fuel cells have a wide range of applications in bioremediation and wastewater treatment. In this way, sustainable energy production can be obtained from renewable sources. Traditional water treatment technologies require high energy input. Microbial fuel cells offer an alternative paradigm as they use waste as an energy source. One of the most important parameters determining the effectiveness of microbial fuel cells in wastewater treatment is chemical oxygen demand (Yao et al., 2023). With this technology, a significant reduction in chemical oxygen demand, which is an important parameter of pollution, can be achieved. In addition, various heavy metals and pharmaceutical wastes found in wastewater can be bioremediated (Abourached et al., 2014; Catal et al., 2015; Akagunduz et al., 2022; Pugazhendi et al., 2022). In this regard, microbial fuel cell technology has an important potential for bioremediation. These environmental pollutants mixed into wastewater from various industries negatively affect not only humans but also other living elements of nature in our ecosystem (Ozdemir et al., 2019). In order to guarantee environmental health, these pollutants need to be removed, especially before releasing wastewater to nature. Exoelectrogenic microorganisms in microbial fuel cells can remove and detoxify these pollutants by various methods. Microbial fuel cells can function in environments with low oxygen levels. In addition, voltage data processed as signals during the electricity production process also has potential applications in the biosensor field (Adekunle et al., 2021). In addition, the energy produced can also be used to operate other devices used in a wastewater treatment plant. In the real field of application, there are still obstacles to be solved in terms of microbial fuel cells. Especially large-scale wastewater treatment and scale-up remain a significant obstacle. However, studies are continuing to adapt it to biosensor technologies, which are still very popular as a research field.

Table 1. Recent MFC performances.

MFC type	Electron donor (substrate)	Cathode	Power density	Reference
Multiple cloth electrode assemblies internally connected in series	Sodium acetate (5.9 g/L or 100mM)	Air cathode	3.5 W/m ²	Fan et al., 2024
Single chamber	Sodium acetate (1 g/L)	Air cathode	303 mW/m ²	Sonmez et al., 2024
Single chamber scaled-up (2 L)	Sodium acetate (850 mg/L)	Air cathode	7.87 ± 2.72 mW/m ²	Sorgato et al., 2023
Bio-anode microfluidic	Sodium acetate (4.65 g/L)	Potassium ferricyanide	1.05 W/m ²	Ouyang et al., 2023
A single-chamber with a ceramic membrane separator	Synthetic potato-process wastewater	Synthetic potato-process wastewater using submerged carbon cloth	130.2 ± 45.4 mW/m ²	Sato et al., 2023
Single chamber	Molasses	Air cathode	169.86 mW/m ²	Hu et al., 2023
Two chamber	Glucose (0.5 g/L)	Buffer using air pump	130.72 mW/m ²	Mahmoodzadeh et al., 2023
Soil-based	Sodium acetate (1.2 g/L)	Air cathode	227 mW/m ²	Kilinc and Catal 2023
Single chamber	Sodium acetate (30 mM)	Air cathode	6840 mW/m ²	Catal et al., 2024
Two chamber	LB + M9	Potassium ferricyanide (50 mM)	3366 ± 42 Mw/m ²	Kirubaharan et al., 2023
duckweed composite constructed wetland	Domestic wastewater containing sucrose	Free water layer	42.93 mW/m ²	Jain et al., 2023
Dual-chamber MFC	Distillery wastewater and domestic wastewater	50 mM sodium phosphate solution using air pump	162.5 ± 2 mW/m ²	Jaswal et al., 2023

Biosensors and environmental monitoring

Microbial fuel cells have the potential to be used not only in electricity generation but also as biosensors. The voltage data resulting from the transfer of electrons released as a result of the metabolic activities of microorganisms to the anode surface and the production of electricity can function as a signal for detection of various compounds such as bisphenol A (Zhu et al., 2023). Microbial fuel cells can function as biosensors by exploiting the complex interaction between microorganisms and target compounds. However, there are some obstacles to overcome before microbial fuel cells can function as biosensors. The most important of these are sensitivity and selectivity (Zhu et al., 2023). The basic principle of using microbial fuel cells as biosensors is the interaction between the target molecule and the exoelectrogenic microbial community. The target

molecule can often be a contaminant. This pollutant may be a heavy metal in the wastewater system or a waste drug molecule such as antibiotics (Catal et al., 2015). In the presence of the contaminant molecule, the metabolism of microorganisms is affected, which can cause measurable differences in voltage data that serve as signals. For the optimization of the system, researchers continue their research to correlate the chemical power with the concentration of the target molecule. However, one of the main problems here is that molecules other than the target molecule or physical or chemical factors may interfere with the interaction between the microorganism and the target molecule. Therefore, there is a need to investigate new approaches to increase specificity in the future. Various organic pollutants, heavy metals, biomolecules and pathogenic microorganisms can be detected with microbial fuel cells (Ma et al., 2022). While there are studies on the detection of organic pollutants such as pesticides and herbicides, heavy metals such as lead, zinc, mercury and various pathogenic microorganisms that are a threat to public health can also be detected by microbial fuel cells (Abourached et al., 2014; Chouler and Di Lorenzo 2019; Adekunle et al., 2023). In order to customize this microbial response, studies have been carried out to design microbial communities, and by using microorganisms known to sequester certain pollutants, it has become possible to develop more sensitive biosensors against these pollutants. There are still challenges to be overcome before they can be used as biosensors. Such application-oriented new designs and the development of easy-to-transport and inexpensive systems are approaches that can help microbial fuel cells become widespread. Despite all these difficulties, with the development of optimized microbial fuel cells in the future, molecules and compounds that pose a threat to environmental health can be monitored and even find a place in wide application areas such as food safety and biosecurity. Therefore, microbial fuel cells, which are a clean production technology, can also reach wide use in the field of biosensors in the future.

Challenges

Although microbial fuel cells can be used practically on a laboratory scale, there are some challenges when it comes to scale-up. The efficiency achieved with microbial fuel cells, which are mostly used at laboratory scale, decreases as the scale is increased (Selvasembian et al., 2022). In large-scale microbial fuel cells, the interaction between microorganisms and electrodes is negatively affected. This negatively affects microbial activity and productivity. Another problem is that as the scale increases, the internal resistance in microbial fuel cells also increases (Motos et al., 2017). Increasing internal resistance also causes ohmic losses to increase and power output to decrease. Pilot-scale microbial fuel cells studied before the development of microbial fuel cells suitable for wastewater treatment plants have shown promising results. Microbial fuel cells at laboratory and pilot scale also provide prototypes for larger-scale designs and provide preliminary data to understand the functioning of the system. Apart from laboratory applications, scale-up seems feasible, especially for use in remote areas. These scale-up studies require both cost and financial funding to sustain the research. Optimizing designs, investigating cost-effective materials, and creating proficient microbial fuel cell operation and support conventions are pivotal steps. In any case, the potential benefits of microbial fuel cells (wastewater treatment, bioremediation, and clean vitality generation) make overcoming these challenges beneficial. As investigate advances, microbial fuel cells can be anticipated to develop as a reasonable and economical innovation for a cleaner, more energy-independent future.

The type and concentration of organic matter found in wastewater significantly affects the power output of

microbial fuel cells (Catal et al., 2008b). The abundance of substrates that can be degraded quickly and easily is also a disadvantage. It is also directly related to the metabolic activities of the microorganisms used in this technology. The efficiency of electron transfer is also related to the electrode materials used in the system. Increasing internal resistance due to increase in size also poses a problem in microbial fuel cells. It is especially important to implement new approaches that can positively affect the interaction between the electron surface and microorganisms with the developments in nanotechnology. Additionally, when it comes to wastewater, there are also factors that cause pollution and can accumulate or cause corrosion in microbial fuel cells. The fact that the cathode section requires additional ventilation to increase efficiency in most cases increases the cost and makes operations difficult.

Conclusion

In the future, it is very likely that wastewater treatment plants that can generate electricity on their own will be developed and microbial fuel cells that can work to detect targeted molecules remotely will be implemented. With this innovative and clean technology, converting organic waste materials into added value can be achieved with the help of exoelectrogenic microorganisms. Microbial fuel cells work like biological batteries, but unlike batteries, they are open systems. Since microorganisms are already living beings, they require the use of an open system and can break down the organic materials provided and convert them into electricity. This technology is versatile in many aspects. While it allows wastewater treatment, it can simultaneously produce clean energy. Since they work naturally with the help of microorganisms, they have many advantages in terms of renewable and sustainability. However, considering the research conducted and the field of application, it is safe to state that this technology is yet at the age of infancy. Efficiency values in power output are still a limiting factor for large-scale applications. There is also a need to develop appropriate optimized microbial fuel cell designs and discover suitable microbial communities. Achieving an increase in energy efficiency through research carried out despite all these difficulties can revolutionize power resources. With the widespread use of this innovative technology, the way can be paved for a cleaner and more environmentally friendly way that meets and supports humanity's energy needs.

Conflict of interest

The authors declare no conflict of interest.

Data availability statement

Data sharing is not applicable to this review article as no datasets were generated or analyzed during the current study.

Ethics committee approval

Ethics committee approval is not required for this article.

Authors' contribution statement

Tunc Catal and Hong Liu designed this article. Tunc Catal and Hong Liu wrote and revised the paper.

Use of Artificial Intelligence: No artificial intelligence-based tools or applications were used in the preparation of this study. The entire content of the study was produced by the author(s) in accordance with scientific research methods and academic ethical principles.

ORCID IDs and emails of the authors

Tunc Catal | ORCID ORCID 0000-0003-2990-8680 | tunc.catal@uskudar.edu.tr

Hong Liu | ORCID 0000-0001-6083-4101 | hong.liu@oregonstate.edu

References

- Abourached, C., Catal, T., & Liu, H. (2014). Efficacy of single-chamber microbial fuel cells for removal of cadmium and zinc with simultaneous electricity production. *Water Research* 51, 228-233. <https://doi.org/10.1016/j.watres.2013.10.062>
- Abdelkareem, M. A., Elsaid, K., Wilberforce, T., Kamil, M., Sayed, E. T., & Olabi, A. (2021). Environmental aspects of fuel cells: A review. *The Science of the total environment*, 752, 141803. <https://doi.org/10.1016/j.scitotenv.2020.141803>
- Aber, S., Shi, Z., Xing, K., Rameezdeen, R., Chow, C. W. K., Hagare, D., & Jindal, T. (2023). Microbial Desalination Cell for Sustainable Water Treatment: A Critical Review. *Global challenges (Hoboken, NJ)*, 7(10), 2300138. <https://doi.org/10.1002/gch2.202300138>
- Adekunle, A., Gomez Vidales, A., Woodward, L., & Tartakovsky, B. (2021). Microbial fuel cell soft sensor for real-time toxicity detection and monitoring. *Environmental science and pollution research international*, 28(10), 12792–12802. <https://doi.org/10.1007/s11356-020-11245-6>
- Adekunle, A., Bambace, S., Tanguay-Rioux, F., & Tartakovsky, B. (2023). Microbial Fuel Cell Biosensor with Capillary Carbon Source Delivery for Real-Time Toxicity Detection. *Sensors (Basel, Switzerland)*, 23(16), 7065. <https://doi.org/10.3390/s23167065>
- Aiyer, K. S. (2020). How does electron transfer occur in microbial fuel cells?. *World journal of microbiology & biotechnology*, 36(2), 19. <https://doi.org/10.1007/s11274-020-2801-z>
- Ait-Itto, F. Z., Behan, J. A., Martinez, M., & Barrière, F. (2024). Development of bioanodes rich in exoelectrogenic bacteria using iron-rich palaeomarine sediment inoculum. *Bioelectrochemistry (Amsterdam, Netherlands)*, 156, 108618. <https://doi.org/10.1016/j.bioelechem.2023.108618>
- Akagunduz, D., Cebecioglu, R., Ozen, F., Ozdemir, M., Bermek, H., Tarhan, N., Arslan, A., Catal, T. 2022. Effects of Psychoactive Pharmaceuticals in Wastewater on Electricity Generation in Microbial Fuel Cells. *CLEAN–Soil, Air, Water*, 2100027. <https://doi.org/10.1002/clen.202100027>
- Akul, N.B., Cebecioglu, R., Akagunduz, D., Bermek, H., Ozdemir, M., Catal, T. 2021. Effects of mevastatin on electricity generation in microbial fuel cells. *Polish Journal of Environmental Studies* 30 (6), 5407. <https://doi.org/10.15244/pjoes/133402>
- An, J., Kim, B., Jang, J. K., Lee, H. S., & Chang, I. S. (2014). New architecture for modulization of membraneless and single-chambered microbial fuel cell using a bipolar plate-electrode assembly (BEA). *Biosensors & bioelectronics*, 59, 28–34. <https://doi.org/10.1016/j.bios.2014.02.063>
- Antolini, E. (2015). Composite materials for polymer electrolyte membrane microbial fuel cells. *Biosensors & bioelectronics*, 69, 54–70. <https://doi.org/10.1016/j.bios.2015.02.013>
- Apollon, W. (2023). An Overview of Microbial Fuel Cell Technology for Sustainable Electricity Production. *Membranes*, 13(11), 884. <https://doi.org/10.3390/membranes13110884>
- Arkatkar, A., Mungray, A. K., & Sharma, P. (2021). Biological modification in air-cathode microbial fuel cell: Effect on oxygen diffusion, current generation and wastewater degradation. *Chemosphere*,

- 284, 131243. <https://doi.org/10.1016/j.chemosphere.2021.131243>
- Babanova, S., Hubanova, Y., & Mitov, M. (2011). Influence of artificial mediators on yeast-based fuel cell performance. *Journal of bioscience and bioengineering*, 112(4), 379–387. <https://doi.org/10.1016/j.jbiosc.2011.06.008>
- Bazina, N., Ahmed, T. G., Almdaaf, M., Jibia, S., & Sarker, M. (2023). Power generation from wastewater using microbial fuel cells: A review. *Journal of biotechnology*, 374, 17–30. <https://doi.org/10.1016/j.jbiotec.2023.07.006>
- Behera, M., Jana, P. S., & Ghangrekar, M. M. (2010). Performance evaluation of low cost microbial fuel cell fabricated using earthen pot with biotic and abiotic cathode. *Bioresource technology*, 101(4), 1183–1189. <https://doi.org/10.1016/j.biortech.2009.07.089>
- Bermek, H., Catal, T., Akan, S. S., Ulutaş, M. S., Kumru, M., Özgüven, M., Liu, H., Özçelik, B., & Akarsubaşı, A. T. (2014). Olive mill wastewater treatment in single-chamber air-cathode microbial fuel cells. *World journal of microbiology & biotechnology*, 30(4), 1177–1185. <https://doi.org/10.1007/s11274-013-1541-8>
- Bhaduri, S., & Behera, M. (2024). From single-chamber to multi-anodic microbial fuel cells: A review. *Journal of environmental management*, 355, 120465. <https://doi.org/10.1016/j.jenvman.2024.120465>
- Biffinger, J. C., Pietron, J., Bretschger, O., Nadeau, L. J., Johnson, G. R., Williams, C. C., Nealson, K. H., & Ringeisen, B. R. (2008). The influence of acidity on microbial fuel cells containing *Shewanella oneidensis*. *Biosensors & bioelectronics*, 24(4), 906–911. <https://doi.org/10.1016/j.bios.2008.07.034>
- Catal, T., Xu, S., Li, K., Bermek, H., & Liu, H. (2008a). Electricity generation from polyalcohols in single-chamber microbial fuel cells. *Biosensors & bioelectronics*, 24(4), 855–860. <https://doi.org/10.1016/j.bios.2008.07.015>
- Catal, T., Li, K., Bermek, H., Liu, H. (2008b). Electricity production from twelve monosaccharides using microbial fuel cells. *Journal of Power Sources* 175 (1), 196-200. <https://doi.org/10.1016/j.jpowsour.2007.09.083>
- Catal, T., Fan, Y., Li, K., Bermek, H., Liu, H. (2011a). Utilization of mixed monosaccharides for power generation in microbial fuel cells. *Journal of Chemical Technology & Biotechnology* 86 (4), 570-574. <https://doi.org/10.1002/jctb.2554>
- Catal, T., Kavanagh, P., O’Flaherty, V., Leech, D. (2011b). Generation of electricity in microbial fuel cells at sub-ambient temperatures. *Journal of Power Sources* 196 (5), 2676-2681. <https://doi.org/10.1016/j.jpowsour.2010.11.031>
- Catal, T., Cysneiros, D., O’Flaherty, V., & Leech, D. (2011c). Electricity generation in single-chamber microbial fuel cells using a carbon source sampled from anaerobic reactors utilizing grass silage. *Bioresource technology*, 102(1), 404-410. <https://doi.org/10.1016/j.biortech.2010.07.006>
- Catal, T., Lesnik, K.L., & Liu, H. (2015). Suppression of methanogenesis for hydrogen production in single-chamber microbial electrolysis cells using various antibiotics. *Bioresource Technology*, 187, 77-83. <https://doi.org/10.1016/j.biortech.2015.03.099>.
- Catal, T., Yavaser, S., Enisoglu-Atalay, V., Bermek, H., & Ozilhan, S. (2018). Monitoring of neomycin

- sulfate antibiotic in microbial fuel cells. *Bioresource technology*, 268, 116–120. <https://doi.org/10.1016/j.biortech.2018.07.122>
- Catal, T., Kul, A., Atalay, V.E., Bermek, H., Ozilhan, S., & Tarhan, N. (2019a). Efficacy of microbial fuel cells for sensing of cocaine metabolites in urine-based wastewater. *Journal of Power Sources*, 414, 1-7. <https://doi.org/10.1016/j.jpowsour.2018.12.078>
- Catal, T., Liu, H., Fan, Y., & Bermek, H. (2019b). A clean technology to convert sucrose and lignocellulose in microbial electrochemical cells into electricity and hydrogen. *Bioresource technology reports*, 5, 331-334.. <https://doi.org/10.1016/j.biteb.2018.10.002>
- Catal, T., Liu, H., Kilinc, B., & Yilancioglu, K. (2024). Extracellular polymeric substances in electroactive biofilms play a crucial role in improving the efficiency of microbial fuel and electrolysis cells. *Letters in applied microbiology*, 77(3), ovae017. <https://doi.org/10.1093/lambio/ovae017>
- Cebecioglu, R., Akagunduz, D., & Catal, T. (2021). Hydrogen production in single-chamber microbial electrolysis cells using Ponceau S dye. *3 Biotech*, 11(1), 27. <https://doi.org/10.1007/s13205-020-02563-0>
- Cebecioglu, R.E., Akagunduz, D., Bermek, H., Atalay, V.E., & Catal, T. (2022). Decolorization mechanisms of reactive yellow 145 and ponceau S in microbial fuel cells during simultaneous electricity production. *Main Group Chemistry*, 21(3), 851-863. <https://doi.org/10.3233/MGC-210180>
- Chandran, M., Palanisamy, K., Benson, D., & Sundaram, S. (2022). A Review on Electric and Fuel Cell Vehicle Anatomy, Technology Evolution and Policy Drivers towards EVs and FCEVs Market Propagation. *Chem Rec*, 22(2), e202100235.. <https://doi.org/10.1002/tcr.202100235>.
- Chen, L., Zhang, P., Shang, W., Zhang, H., Li, Y., Zhang, W., Zhang, Z., & Liu, F. (2018). Enrichment culture of electroactive microorganisms with high magnetic susceptibility enhances the performance of microbial fuel cells. *Bioelectrochemistry (Amsterdam, Netherlands)*, 121, 65–73. <https://doi.org/10.1016/j.bioelechem.2018.01.005>
- Chen, J., Zhao, K., Wu, Y., Liu, J., Wang, R., Yang, Y., & Liu, Y. (2023). Improved bioelectrochemical performance of MnO₂ nanorods modified cathode in microbial fuel cell. *Environmental science and pollution research international*, 30(17), 49052–49059. <https://doi.org/10.1007/s11356-023-25787-y>
- Chouler, J., & Di Lorenzo, M. (2019). Pesticide detection by a miniature microbial fuel cell under controlled operational disturbances. *Water science and technology: a journal of the International Association on Water Pollution Research*, 79(12), 2231–2241. <https://doi.org/10.2166/wst.2019.207>
- Delord, B., Neri, W., Bertaux, K., Derre, A., Ly, I., Mano, N., & Poulin, P. (2017). Carbon nanotube fiber mats for microbial fuel cell electrodes. *Bioresource technology*, 243, 1227–1231. <https://doi.org/10.1016/j.biortech.2017.06.170>
- Dong, M., Nielsen, L. P., Yang, S., Klausen, L. H., & Xu, M. (2024). Cable bacteria: widespread filamentous electroactive microorganisms protecting environments. *Trends in microbiology*, 32(7), 697–706. <https://doi.org/10.1016/j.tim.2023.12.001>
- Efrain, A., Saeed, M., Elbaz, M. A., Alaa, M., Ahmed, N., Adel, R., Hazem, Y., Elshatoury, E., &

- Gomaa, O. M. (2023). *Shewanella chilikensis* MG22 isolated from tannery site for malachite green decolorization in microbial fuel cell: a proposed solution for recirculating aquaculture system (RAS). *Microbial cell factories*, 22(1), 142. <https://doi.org/10.1186/s12934-023-02152-9>
- Estrada-Arriaga, E. B., Hernández-Romano, J., García-Sánchez, L., Guillén Garcés, R. A., Bahena-Bahena, E. O., Guadarrama-Pérez, O., & Moeller Chavez, G. E. (2018). Domestic wastewater treatment and power generation in continuous flow air-cathode stacked microbial fuel cell: Effect of series and parallel configuration. *Journal of environmental management*, 214, 232–241. <https://doi.org/10.1016/j.jenvman.2018.03.007>
- Fan, Y., Janicek, A., & Liu, H. (2024). Stable and high voltage and power output of CEA-MFCs internally connected in series (iCiS-MFC). *The European Chemistry and Biotechnology Journal*, (1), 47–57. <https://doi.org/10.62063/ecb-17>
- Freguia, S., Masuda, M., Tsujimura, S., & Kano, K. (2009). *Lactococcus lactis* catalyses electricity generation at microbial fuel cell anodes via excretion of a soluble quinone. *Bioelectrochemistry (Amsterdam, Netherlands)*, 76(1-2), 14–18. <https://doi.org/10.1016/j.bioelechem.2009.04.001>
- Fu, Q., Kobayashi, H., Kawaguchi, H., Wakayama, T., Maeda, H., & Sato, K. (2013). A thermophilic gram-negative nitrate-reducing bacterium, *Calditerrivibrio nitroreducens*, exhibiting electricity generation capability. *Environmental science & technology*, 47(21), 12583–12590. <https://doi.org/10.1021/es402749f>
- Fujimura, S., Kamitori, K., Kamei, I., Nagamine, M., Miyoshi, K., & Inoue, K. (2022). Performance of stacked microbial fuel cells with barley-shochu waste. *Journal of bioscience and bioengineering*, 133(5), 467–473. <https://doi.org/10.1016/j.jbiosc.2022.02.004>
- Gajda, I., Greenman, J., & Ieropoulos, I. (2020). Microbial Fuel Cell stack performance enhancement through carbon veil anode modification with activated carbon powder. *Applied energy*, 262, 114475. <https://doi.org/10.1016/j.apenergy.2019.114475>
- Georg, S., de Eguren Cordoba, I., Sleutels, T., Kuntke, P., Heijne, A. T., & Buisman, C. J. N. (2020). Competition of electrogens with methanogens for hydrogen in bioanodes. *Water research*, 170, 115292. <https://doi.org/10.1016/j.watres.2019.115292>
- Gul, H., Raza, W., Lee, J., Azam, M., Ashraf, M., & Kim, K. H. (2021). Progress in microbial fuel cell technology for wastewater treatment and energy harvesting. *Chemosphere*, 281, 130828. <https://doi.org/10.1016/j.chemosphere.2021.130828>
- Jain, M., Sai Kiran, P., Ghosal, P. S., & Gupta, A. K. (2023). Development of microbial fuel cell integrated constructed wetland (CMFC) for removal of paracetamol and diclofenac in hospital wastewater. *Journal of environmental management*, 344, 118686. <https://doi.org/10.1016/j.jenvman.2023.118686>
- Jaswal, V., J, R. B., & N, Y. K. (2023). Synergistic effect of TiO₂ nanostructured cathode in microbial fuel cell for bioelectricity enhancement. *Chemosphere*, 330, 138556. <https://doi.org/10.1016/j.chemosphere.2023.138556>
- Jia, Y., Ma, D., & Wang, X. (2020). Electrochemical preparation and application of PANI/MWNT and PPy/MWNT composite anodes for anaerobic fluidized bed microbial fuel cell. *3 Biotech*, 10(1), 3. <https://doi.org/10.1007/s13205-019-1950-y>

- Hu, X., Liu, J., Cheng, W., Li, X., Zhao, Y., Wang, F., Geng, Z., Wang, Q., & Dong, Y. (2023). Synergistic interactions of microbial fuel cell and microbially induced carbonate precipitation technology with molasses as the substrate. *Environmental research*, 228, 115849. <https://doi.org/10.1016/j.envres.2023.115849>
- Icaza-Alvarez, D., Jurado, F., Flores, C., Ortiz, G.R. (2023). Ecuadorian electrical system: Current status, renewable energy and projections. *Heliyon*. 9(5), e16010. <https://doi.org/10.1016/j.heliyon.2023.e16010>.
- Ishaq, A., Said, M. I. M., Azman, S. B., Dandajeh, A. A., Lemar, G. S., & Jagun, Z. T. (2023). Utilization of microbial fuel cells as a dual approach for landfill leachate treatment and power production: a review. *Environmental science and pollution research international*, 10.1007/s11356-023-30841-w. Advance online publication. <https://doi.org/10.1007/s11356-023-30841-w>
- Kampker, A., P. Ayvaz, C. Schön, J. Karstedt, R. Förstmann, F. Welker, (2020). Challenges towards large-scale fuel cell production: Results of an expert assessment study, *International Journal of Hydrogen Energy*, 45(53), 29288-29296. <https://doi.org/10.1016/j.ijhydene.2020.07.180>.
- Kang, Y. L., Ibrahim, S., & Pichiah, S. (2015). Synergetic effect of conductive polymer poly(3,4-ethylenedioxythiophene) with different structural configuration of anode for microbial fuel cell application. *Bioresource technology*, 189, 364–369. <https://doi.org/10.1016/j.biortech.2015.04.044>
- Khan, A., Salama, E.S., Chen, Z., Ni, H., Zhao, S., Zhou, T., Pei, Y., Sani, R.K., Ling, Z., Liu, P., Li, X. (2020). A novel biosensor for zinc detection based on microbial fuel cell system. *Biosensors and bioelectronics* 147, 111763. <https://doi.org/10.1016/j.bios.2019.111763>.
- Kilinc, B., Akagunduz, D., Ozdemir, M., Kul, A., & Catal, T. (2023). Hydrogen production using cocaine metabolite in microbial electrolysis cells. *3 Biotech*, 13(11), 382. <https://doi.org/10.1007/s13205-023-03805-7>
- Kilinc, B., & Catal, T. (2023). A Novel Microbial Fuel Cell for the Sensing of Sodium Acetate in Soil. *Polish Journal of Environmental Studies*, 32(5), 4931-4936. <https://doi.org/10.15244/pjoes/168804>
- Kirubakaran, C. J., Wang, J. W., Abbas, S. Z., Shah, S. B., Zhang, Y., Wang, J. X., & Yong, Y. C. (2023). Self-assembly of cell-embedding reduced graphene oxide/ polypyrrole hydrogel as efficient anode for high-performance microbial fuel cell. *Chemosphere*, 326, 138413. <https://doi.org/10.1016/j.chemosphere.2023.138413>
- Koók, L., Quémener, E. D., Bakonyi, P., Zitka, J., Trably, E., Tóth, G., Pavlovec, L., Pientka, Z., Bernet, N., Bélafi-Bakó, K., & Nemestóthy, N. (2019). Behavior of two-chamber microbial electrochemical systems started-up with different ion-exchange membrane separators. *Bioresource technology*, 278, 279–286. <https://doi.org/10.1016/j.biortech.2019.01.097>
- Kumru, M., Eren, H., Catal, T., Bermek, H., & Akarsubaşı, A.T. (2012). Study of azo dye decolorization and determination of cathode microorganism profile in air-cathode microbial fuel cells. *Environmental technology*, 33 (18), 2167-2175. <https://doi.org/10.1080/09593330.2012.660655>
- Li, W. W., & Yu, H. Q. (2015). Stimulating sediment bioremediation with benthic microbial fuel cells. *Biotechnology advances*, 33(1), 1–12. <https://doi.org/10.1016/j.biotechadv.2014.12.011>
- Li, H., Cheng, J., Dong, H., Fang, Z., Zhou, J., & Lin, R. (2021a). Zeolitic imidazolate framework-derived porous carbon enhances methanogenesis by facilitating interspecies electron transfer: Understanding

- fluorimetric and electrochemical responses of multi-layered extracellular polymeric substances. *The Science of the total environment*, 781, 146447. <https://doi.org/10.1016/j.scitotenv.2021.146447>
- Li, Y., Liu, J., Chen, X., Wu, J., Li, N., He, W., & Feng, Y. (2021b). Tailoring Surface Properties of Electrodes for Synchronous Enhanced Extracellular Electron Transfer and Enriched Exoelectrogens in Microbial Fuel Cells. *ACS applied materials & interfaces*, 13(49), 58508–58521. <https://doi.org/10.1021/acsami.1c16583>
- Liang, P., Duan, R., Jiang, Y., Zhang, X., Qiu, Y., & Huang, X. (2018). One-year operation of 1000-L modularized microbial fuel cell for municipal wastewater treatment. *Water research*, 141, 1–8. <https://doi.org/10.1016/j.watres.2018.04.066>
- Ma, Z., Meliana, C., Munawaroh, H. S. H., Karaman, C., Karimi-Maleh, H., Low, S. S., & Show, P. L. (2022). Recent advances in the analytical strategies of microbial biosensor for detection of pollutants. *Chemosphere*, 306, 135515. <https://doi.org/10.1016/j.chemosphere.2022.135515>
- Mahmoud, M., Gad-Allah, T. A., El-Khatib, K. M., & El-Gohary, F. (2011). Power generation using spinel manganese-cobalt oxide as a cathode catalyst for microbial fuel cell applications. *Bioresource technology*, 102(22), 10459–10464. <https://doi.org/10.1016/j.biortech.2011.08.123>
- Mahmoodzadeh, F., Navidjouy, N., Alizadeh, S., & Rahimnejad, M. (2023). Investigation of microbial fuel cell performance based on the nickel thin film modified electrodes. *Scientific reports*, 13(1), 20755. <https://doi.org/10.1038/s41598-023-48290-3>
- Mirza, S. S., Al-Ansari, M. M., Ali, M., Aslam, S., Akmal, M., Al-Humaid, L., & Hussain, A. (2022). Towards sustainable wastewater treatment: Influence of iron, zinc and aluminum as anode in combination with salt bridge on microbial fuel cell performance. *Environmental research*, 209, 112781. <https://doi.org/10.1016/j.envres.2022.112781>
- Merino-Jimenez, I., Gonzalez-Juarez, F., Greenman, J., & Ieropoulos, I. (2019). Effect of the ceramic membrane properties on the microbial fuel cell power output and catholyte generation. *Journal of power sources*, 429, 30–37. <https://doi.org/10.1016/j.jpowsour.2019.04.043>
- Mohyudin, S., Farooq, R., Jubeen, F., Rasheed, T., Fatima, M., & Sher, F. (2022). Microbial fuel cells a state-of-the-art technology for wastewater treatment and bioelectricity generation. *Environmental research*, 204(Pt D), 112387. <https://doi.org/10.1016/j.envres.2021.112387>
- Moon, H., Chang, I. S., & Kim, B. H. (2006). Continuous electricity production from artificial wastewater using a mediator-less microbial fuel cell. *Bioresource technology*, 97(4), 621–627. <https://doi.org/10.1016/j.biortech.2005.03.027>
- Motos, R.P., Molina, G., Ter Heijne, A., Sleutels, T., Saakes, M., & Buisman, C. (2017). Prototype of a scaled-up microbial fuel cell for copper recovery. *Journal of chemical technology and biotechnology (Oxford, Oxfordshire: 1986)*, 92(11), 2817–2824. <https://doi.org/10.1002/jctb.5353>
- Ouyang, T., Liu, W., Shi, X., Li, Y., & Hu, X. (2023). Multi-criteria assessment and triple-objective optimization of a bio-anode microfluidic microbial fuel cell. *Bioresource technology*, 382, 129193. <https://doi.org/10.1016/j.biortech.2023.129193>
- Ozdemir, M., Enisoglu-Atalay, V., Bermek, H., Ozilhan, S., Tarhan, N., & Catal, T. (2019). Removal of a cannabis metabolite from human urine in microbial fuel cells generating electricity. *Bioresource technology reports*, 5, 121–126. <https://doi.org/10.1016/j.biteb.2019.01.003>

- Prathiba, S., Kumar, P. S., & Vo, D. N. (2022). Recent advancements in microbial fuel cells: A review on its electron transfer mechanisms, microbial community, types of substrates and design for bio-electrochemical treatment. *Chemosphere*, 286(Pt 3), 131856. <https://doi.org/10.1016/j.chemosphere.2021.131856>
- Priya, A. K., Subha, C., Kumar, P. S., Suresh, R., Rajendran, S., Vasseghian, Y., & Soto-Moscoso, M. (2022). Advancements on sustainable microbial fuel cells and their future prospects: A review. *Environmental research*, 210, 112930. <https://doi.org/10.1016/j.envres.2022.112930>
- Pugazhendhi, A., Jamal, M. T., Al-Mur, B. A., & Jeyakumar, R. B. (2022). Bioaugmentation of electrogenic halophiles in the treatment of pharmaceutical industrial wastewater and energy production in microbial fuel cell under saline condition. *Chemosphere*, 288(Pt 2), 132515. <https://doi.org/10.1016/j.chemosphere.2021.132515>
- Qiu, B., Hu, Y., Tang, C., Chen, Y., & Cheng, J. (2021). Simultaneous mineralization of 2-anilinophenylacetate and denitrification by Ru/Fe modified biocathode double-chamber microbial fuel cell. *The Science of the total environment*, 792, 148446. <https://doi.org/10.1016/j.scitotenv.2021.148446>
- Reguera G. (2018). Microbial nanowires and electroactive biofilms. *FEMS microbiology ecology*, 94(7), 10.1093/femsec/fiy086. <https://doi.org/10.1093/femsec/fiy086>
- Roh, S. H., & Woo, H. G. (2015). Carbon Nanotube Composite Electrode Coated with Polypyrrole for Microbial Fuel Cell Application. *Journal of nanoscience and nanotechnology*, 15(1), 484–487. <https://doi.org/10.1166/jnn.2015.8404>
- Roy, H., Rahman, T. U., Tasnim, N., Arju, J., Rafid, M. M., Islam, M. R., Pervez, M. N., Cai, Y., Naddeo, V., & Islam, M. S. (2023). Microbial Fuel Cell Construction Features and Application for Sustainable Wastewater Treatment. *Membranes*, 13(5), 490. <https://doi.org/10.3390/membranes13050490>
- Santoro, C., Serov, A., Narvaez Villarrubia, C. W., Stariha, S., Babanova, S., Schuler, A. J., Artyushkova, K., & Atanassov, P. (2015). Double-chamber microbial fuel cell with a non-platinum-group metal Fe-N-C cathode catalyst. *ChemSusChem*, 8(5), 828–834. <https://doi.org/10.1002/cssc.201402570>
- Saran, C., Purchase, D., Saratale, G.D., Saratale, R.G., Romanholo, Ferreira, L.F., Bilal, M., Iqbal, H.M.N., Hussain, C.M., Mulla, S.I., & Bharagava, R.N. (2023). Microbial fuel cell: A green ecofriendly agent for tannery wastewater treatment and simultaneous bioelectricity/power generation. *Chemosphere*, 312(Pt 1), 137072 <https://doi.org/10.1016/j.chemosphere.2022.137072>.
- Sato, C., Apollon, W., Luna-Maldonado, A. I., Paucar, N. E., Hibbert, M., & Dudgeon, J. (2023). Integrating Microbial Fuel Cell and Hydroponic Technologies Using a Ceramic Membrane Separator to Develop an Energy-Water-Food Supply System. *Membranes*, 13(9), 803. <https://doi.org/10.3390/membranes13090803>
- Selvasembian, R., Mal, J., Rani, R., Sinha, R., Agrahari, R., Joshua, I., Santhiagu, A., & Pradhan, N. (2022). Recent progress in microbial fuel cells for industrial effluent treatment and energy generation: Fundamentals to scale-up application and challenges. *Bioresource technology*, 346, 126462. <https://doi.org/10.1016/j.biortech.2021.126462>
- Sen, P., Akagunduz, D., Aghdam, A.S., Cebeci, F.Ç., Nyokong, T., & Catal, T. (2020). Synthesis of novel Schiff base cobalt (II) and iron (III) complexes as cathode catalysts for microbial fuel cell

- applications. *Journal of Inorganic and Organometallic Polymers and Materials*, 30, 1110-1120. <https://doi.org/10.1007/s10904-019-01286-x>
- Sonmez, E., Avci, B., Mohamed, N., & Bermek, H. (2024). Investigation of performance losses in microbial fuel cells with low platinum loadings on air-cathodes. *The european chemistry and biotechnology journal*, (1), 11–26. <https://doi.org/10.62063/ecb-14>
- Sorgato, A. C., Jeremias, T. C., Lobo, F. L., & Lapolli, F. R. (2023). Microbial fuel cell: Interplay of energy production, wastewater treatment, toxicity assessment with hydraulic retention time. *Environmental research*, 231(Pt 2), 116159. <https://doi.org/10.1016/j.envres.2023.116159>
- Sukkasem, C. (2024) Exploring biofilm-forming bacteria for integration into BioCircuit wastewater treatment. *The european chemistry and biotechnology journal*, 2, 96-109. <https://doi.org/10.62063/ecb-28>
- Suresh, R., Rajendran, S., Kumar, P. S., Dutta, K., & Vo, D. N. (2022). Current advances in microbial fuel cell technology toward removal of organic contaminants - A review. *Chemosphere*, 287(Pt 2), 132186. <https://doi.org/10.1016/j.chemosphere.2021.132186>
- Strik, D. P., Hamelers, H. V., & Buisman, C. J. (2010). Solar energy powered microbial fuel cell with a reversible bioelectrode. *Environmental science & technology*, 44(1), 532–537. <https://doi.org/10.1021/es902435v>
- Tahir, K., Miran, W., Jang, J., Maile, N., Shahzad, A., Moztahida, M., Ghani, A. A., Kim, B., & Lee, D. S. (2021). MnCo₂O₄ coated carbon felt anode for enhanced microbial fuel cell performance. *Chemosphere*, 265, 129098. <https://doi.org/10.1016/j.chemosphere.2020.129098>
- Tejedor-Sanz, S., Li, S., Kundu, B. B., & Ajo-Franklin, C. M. (2023). Extracellular electron uptake from a cathode by the lactic acid bacterium *Lactiplantibacillus plantarum*. *Frontiers in microbiology*, 14, 1298023. <https://doi.org/10.3389/fmicb.2023.1298023>
- Thapa, B. S., Kim, T., Pandit, S., Song, Y. E., Afsharian, Y. P., Rahimnejad, M., Kim, J. R., & Oh, S. E. (2022). Overview of electroactive microorganisms and electron transfer mechanisms in microbial electrochemistry. *Bioresource technology*, 347, 126579. <https://doi.org/10.1016/j.biortech.2021.126579>
- Walter, X. A., Santoro, C., Greenman, J., & Ieropoulos, I. (2020). Scaling up self-stratifying supercapacitive microbial fuel cell. *International journal of hydrogen energy*, 45(46), 25240–25248. <https://doi.org/10.1016/j.ijhydene.2020.06.070>
- Wang, J., Song, X., Wang, Y., Abayneh, B., Ding, Y., Yan, D., & Bai, J. (2016). Microbial community structure of different electrode materials in constructed wetland incorporating microbial fuel cell. *Bioresource technology*, 221, 697–702. <https://doi.org/10.1016/j.biortech.2016.09.116>
- Wang, G., & Feng, C. (2017). Electrochemical Polymerization of Hydroquinone on Graphite Felt as a Pseudocapacitive Material for Application in a Microbial Fuel Cell. *Polymers*, 9(6), 220. <https://doi.org/10.3390/polym9060220>
- Wang, X., Tian, Y., Liu, H., Zhao, X., & Peng, S. (2019). The influence of incorporating microbial fuel cells on greenhouse gas emissions from constructed wetlands. *The Science of the total environment*, 656, 270–279. <https://doi.org/10.1016/j.scitotenv.2018.11.328>
- Wu, D., Zhang, B., Shi, S., Tang, R., Qiao, C., Li, T., Jia, J., Yang, M., Si, X., Wang, Y., Sun, X., Xiao,

- D., Li, F., & Song, H. (2024). Engineering extracellular electron transfer to promote simultaneous brewing wastewater treatment and chromium reduction. *Journal of hazardous materials*, 465, 133171. <https://doi.org/10.1016/j.jhazmat.2023.133171>
- Vidhyeswari, D., Surendhar, A., & Bhuvaneshwari, S. (2022). General aspects and novel PEMss in microbial fuel cell technology: A review. *Chemosphere*, 309(Pt 1), 136454. <https://doi.org/10.1016/j.chemosphere.2022.136454>
- Yao, H., Xiao, J., & Tang, X. (2023). Microbial Fuel Cell-Based Organic Matter Sensors: Principles, Structures and Applications. *Bioengineering (Basel, Switzerland)*, 10(8), 886. <https://doi.org/10.3390/bioengineering10080886>
- Yildiz, I. 1.12 Fossil Fuels, Editor(s): Ibrahim Dincer, Comprehensive Energy Systems, Elsevier, 2018, Pages 521-567, ISBN 9780128149256,
- Yu, M., Yang, Q., Yuan, X., Li, Y., Chen, X., Feng, Y., & Liu, J. (2021). Boosting oxygen reduction and permeability properties of doped iron-porphyrin membrane cathode in microbial fuel cells. *Bioresource technology*, 320(Pt A), 124343. <https://doi.org/10.1016/j.biortech.2020.124343>
- Zhang, J., Jiao, W., Huang, S., Wang, H., Cao, X., Li, X., Sakamaki, T. (2022). Application of microbial fuel cell technology to the remediation of compound heavy metal contamination in soil. *Journal of Environment management* 320, 115670. <https://doi.org/10.1016/j.jenvman.2022.115670>.
- Zhang, G., Liang, D., Zhao, Z., Qi, J., & Huang, L. (2022b). Enhanced performance of microbial fuel cell with electron mediators from tetracycline hydrochloride degradation. *Environmental research*, 206, 112605. <https://doi.org/10.1016/j.envres.2021.112605>
- Zhao, F., Rahunen, N., Varcoe, J. R., Roberts, A. J., Avignone-Rossa, C., Thumser, A. E., & Slade, R. C. (2009). Factors affecting the performance of microbial fuel cells for sulfur pollutants removal. *Biosensors & bioelectronics*, 24(7), 1931–1936. <https://doi.org/10.1016/j.bios.2008.09.030>
- Zheng, L., Lin, X., Liu, Y., Li, H., Sun, Y., & Li, C. (2022). Synergistically enhanced oxygen reduction reaction and oxytetracycline mineralization by FeCoO/GO modified cathode in microbial fuel cell. *The Science of the total environment*, 808, 151873. <https://doi.org/10.1016/j.scitotenv.2021.151873>
- Zhou, H., Xuanyuan, X., Lv, X., Wang, J., Feng, K., Chen, C., Ma, J., & Xing, D. (2023). Mechanisms of magnetic sensing and regulating extracellular electron transfer of electroactive bacteria under magnetic fields. *The Science of the total environment*, 895, 165104. <https://doi.org/10.1016/j.scitotenv.2023.165104>
- Zhu, K., Xu, Y., Yang, X., Fu, W., Dang, W., Yuan, J., & Wang, Z. (2022). Sludge Derived Carbon Modified Anode in Microbial Fuel Cell for Performance Improvement and Microbial Community Dynamics. *Membranes*, 12(2), 120. <https://doi.org/10.3390/membranes12020120>
- Zhu, T. J., Lin, C. W., & Liu, S. H. (2023). Sensitivity and reusability of a simple microbial fuel cell-based sensor for detecting bisphenol A in wastewater. *Chemosphere*, 320, 138082. <https://doi.org/10.1016/j.chemosphere.2023.138082>
- Zhuang, L., Zhou, S., Li, Y., & Yuan, Y. (2010). Enhanced performance of air-cathode two-chamber microbial fuel cells with high-pH anode and low-pH cathode. *Bioresource technology*, 101(10), 3514–3519. <https://doi.org/10.1016/j.biortech.2009.12.105>